

## Lineup of easy-to-use projectors to meet your applications.

\*Projected images are simulations



\*MC-EW403E, MC-EW303E, MC-EX403E, MC-EX353E and MC-EX303E do not support AMX Device Discovery and Crestron Connected.



### LINE UP \*Local availability may be limited.

<b>Network model</b>	<b>MC-EW4051</b> WXGA 4,000 lm	<b>MC-EW3551</b> WXGA 3,800 lm	<b>MC-EW3051</b> WXGA 3,200 lm	<b>MC-EX4551</b> XGA 4,500 lm	<b>MC-EX4051</b> XGA 4,200lm	<b>MC-EX3551</b> XGA 3,700 lm	<b>MC-EX3051</b> XGA 3,300 lm
<b>Basic model</b>	<b>MC-EW403E</b> WXGA 4,000lm	<b>MC-EW303E</b> WXGA 3,200lm	<b>MC-EX403E</b> XGA 4,200lm	<b>MC-EX353E</b> XGA 3,700 lm	<b>MC-EX303E</b> XGA 3,300 lm		

### ACCENTUALIZER and HDCR Network model

ACCENTUALIZER makes pictures look more real by enhancing shade, sharpness, and gloss to make pictures clearer. The HDCR function corrects blurred images caused by room lighting or outside light sources, and creates an effect similar to increasing contrast resulting in clear images even in bright rooms.


\* Comparison photos are simulations.



### IMAGE OPTIMIZER Network model


Equipped with IMAGE OPTIMIZER that maintains visibility of an image through automatic image correction in accordance with lamp consumption.

\* This function may not work properly when HDCR/ACCENTUALIZER is ON.  
\* Comparison photos are simulations.

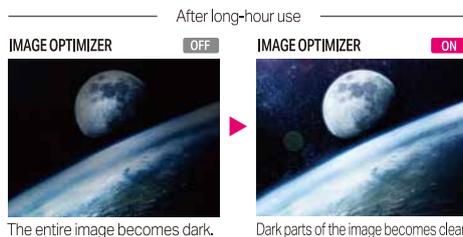

### Perfect Fit Network model


Equipped with Perfect Fit with which the position of four corners and four sides of a projected image can be adjusted. With the remote controller at hand, you can quickly correct the distorted image such as pincushion or barrel.



## Network Function / Capability

### Wireless Capability (Option) Network model

The projector is capable of a wireless network with the optional USB wireless adapter. You can control the projector with a computer via the network, and also project the screen of the computer on which the LiveViewer software is installed.

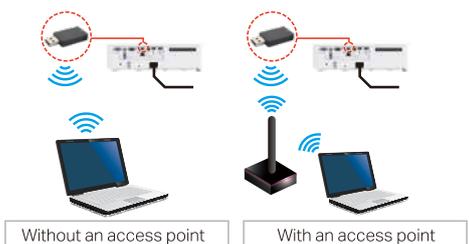

### Smart Device Control Network model

Using the dedicated free online application Projector Quick Connection, you can control the projector from a tablet or smartphone. In addition, you can project images, documents, and photos on the smart device.

\*Projector need to be connected to network.  
\*See the Maxell website for details.  
<http://proj.maxell.co.jp/en/>




\*This picture shows an example of network connection using optional wireless adapter.

### Moderator Control Mode Network model

Setting one computer from the multiple computers (up to 50\*) that are connected to the projector as the moderator (host) makes it possible for the moderator to project from the other computers (clients).

\*1 Image and audio transfer speed may vary depending on number of computer connected.

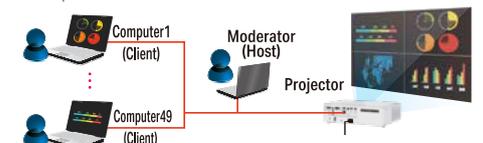

\*To secure better performance, a wired network is preferable. Required to install the LiveViewer software on all the computers. The functions are supported by LiveViewer (Windows® application) only.

\* The software LiveViewer can be downloaded from the website.  
<http://proj.maxell.co.jp/en/>

### Other Useful Features Network model · Internal speaker\*2 · Direct Power On / Off · DICOM® simulation mode\*3 · Audio Pass Through · My Screen · PIN Lock System Basic model

\*2 The network model has a 16w speaker. The basic model has a 1W speaker. \*3 This projector is not a medical device and is not compliant with the DICOM® standard, and neither the projector nor the DICOM® Simulation Mode should be used for medical diagnosis.



Notes · The images in this catalog are representations of the effects and differ from actual images.

Specifications														
Model name	MC-EW4051	MC-EW3551	MC-EW3051	MC-EX4551	MC-EX4051	MC-EX3551	MC-EX3051	MC-EW403E	MC-EW303E	MC-EX403E	MC-EX353E	MC-EX303E		
Display system	3LCD													
Display device	0.59" x 3, aspect ratio 16 : 10			0.63" x 3, aspect ratio 4 : 3			0.59" x 3, aspect ratio 16 : 10			0.63" x 3, aspect ratio 4 : 3				
	1,024,000 pixels H: 1280 x V: 800 (WXGA)			786,432 pixels H: 1,024 x V: 768 (XGA)			1,024,000 pixels H: 1280 x V: 800 (WXGA)			786,432 pixels H: 1,024 x V: 768 (XGA)				
Lens	Manual (1.2x)													
	Manual													
Light source	230 W Lamp													
Screen size	30 - 300 inch													
Light output (Brightness)*1	4,000 lm	3,800 lm	3,200 lm	4,500 lm	4,200 lm	3,700 lm	3,300 lm	4,000 lm	3,200 lm	4,200 lm	3,700 lm	3,300 lm		
Contrast ratio (full white / full black)*2	20,000 : 1													
Speaker	16 W x 1 mono													
Display	15 - 106 kHz													
	50 - 120 Hz													
Display Resolution	Full HD (max.) *Native resolution is WXGA.			Full HD (max.) *Native resolution is XGA.			Full HD (max.) *Native resolution is WXGA.			Full HD (max.) *Native resolution is XGA.				
	1080p (max.) *Native resolution is WXGA.			1080p (max.) *Native resolution is XGA.			1080p (max.) *Native resolution is WXGA.			1080p (max.) *Native resolution is XGA.				
Terminals	COMPUTER IN	Mini D-sub 15-pin connector x 2												
	MONITOR OUT	Mini D-sub 15-pin connector x 1 (shared with COMPUTER IN2)												
	VIDEO IN	RCA connector x 1												
	HDMI IN	HDMI (HDCP compliant) x 2						HDMI (HDCP compliant) x 1						
	AUDIO IN	3.5mm stereo mini connector x 2, RCA connector (L, R) x 1						RCA connector (L, R) x 1						
	AUDIO OUT	3.5mm stereo mini connector x 1												
	CONTROL (RS-232C)	D-sub 9-pin connector x 1												
	LAN	RJ-45 connector x 1												
	USB-A	USB type A x 1 (PC-LESS presentation or Wireless adapter (option))												
	USB-B	USB type B x 1 (USB display*3 and USB mouse control)												
	Network	Wired	100BASE-TX / 10BASE-T											
	Wireless (Option*4)	IEEE 802.11a/b/g/n/ac												
	Operating temperature	0 - 35 °C												
Operating humidity	10 - 90%RH (non-condensing)													
Power requirements	AC 100 V - 120 (50/60 Hz), 3.3 A, AC 220 V - 240 V (50/60 Hz), 1.6 A						AC 100 V - 120 (50/60 Hz), 3.0 A, AC 220 V - 240 V (50/60 Hz), 1.5 A							
Power consumption	AC 100 V - 120 (50/60 Hz) : 320 W, AC 220 V - 240 V (50/60 Hz) : 310 W						AC 100 V - 120 (50/60 Hz) : 290 W, AC 220 V - 240 V (50/60 Hz) : 280 W							
Standby mode power consumption	0.35 W at saving mode*5													
Standard outside dimensions (W x H x D)	355 x 106 x 267 mm (14.0" x 4.2" x 10.5") (Including protruding parts), 349 x 88 x 264 mm (14.0" x 3.5" x 10.4") (Excluding protruding parts)													
Weight	Approx. 3.5 kg (7.7 lbs)						Approx. 3.4 kg (7.5 lbs)							
Accessories	Power cord, Computer cable, Remote control with two AA batteries, Lens cover*6, Adapter cover*6, Security label, User's manual													
Optional parts	USB Wireless Adapter	USB-WL-5G*7												
	Lamp	DT02081												
	Air filter	UX39561												
	Mounting accessories	HAS-EX300 (Bracket for ceiling mount), HAS-104S (Slim adapter for fixing mount), HAS-204L (Standard adapter for fixing mount), HAS-304H (Long adapter for fixing mount)												


\*1 When PICTURE MODE is set to DYNAMIC, ACTIVE IRIS is set to OFF, and ZOOM position is WIDE (max). \*2 When PICTURE MODE is set to DYNAMIC, ACTIVE IRIS is set to ON, and ZOOM position is WIDE (max). \*3 Only for Windows® OS. \*4 Optional wireless adapter is needed. \*5 SAVING mode disables the functions of MONITOR OUT, AUDIO OUT, speaker sound, network communication, RS-232C control except POWER ON command, etc. in standby. \*6 Only for MC-EW4051, MC-EW3551, MC-EW3051, MC-EX4551, MC-EX4051, MC-EX3551 and MC-EX3051 \*7 The availability of the USB-WL-5G varies depending on the country and the region.

## Terminals

MC-EW4051 / MC-EW3551 / MC-EW3051 / MC-EX4551 / MC-EX4051 / MC-EX3551 / MC-EX3051




MC-EW403E / MC-EW303E / MC-EX403E / MC-EX353E / MC-EX303E



(1) COMPUTER IN1 (2) AUDIO IN3 (3) CONTROL (RS-232C) (4) USB-A (5) USB-B (6) HDMI IN1 (7) HDMI IN2 (8) VIDEO (9) LAN (10) AUDIO IN1 (11) AUDIO IN2 (12) AUDIO OUT (13) COMPUTER IN2 / MONITOR OUT

## Projection Distance

### Placed on the horizontal surface



### MC-EW4051 / MC-EW3551 / MC-EW403E

(1,280 x 800) (±10%)

a Screen size (diagonal)	16 : 10 screen			
	b Projection distance		c1 Screen height	c2 Screen height
type	min.	max.	cm	inch
60	1.5	1.9	73	2.8
80	2.0	2.5	99	3.9
100	2.5	3.1	124	4.9
120	3.0	3.8	149	5.9
150	3.8	4.8	187	7.4
200	5.1	6.4	251	9.9

### MC-EW3051 / MC-EW303E

(1,280 x 800) (±10%)

a Screen size (diagonal)	16 : 10 screen			
	b Projection distance		c1 Screen height	c2 Screen height
type	min.	max.	cm	inch
60	1.5	1.9	73	2.8
80	2.0	2.5	99	3.9
100	2.5	3.1	124	4.9
120	3.0	3.8	149	5.9
150	3.8	4.8	187	7.4
200	5.1	6.4	250	9.8

### MC-EX4551 / MC-EX4051 / MC-EX403E

(1,024 x 768) (±10%)


a Screen size (diagonal)	4 : 3 screen			
	b Projection distance		c1 Screen height	c2 Screen height
type	min.	max.	cm	inch
60	1.5	1.7	69	2.7
80	2.0	2.4	93	3.7
100	2.5	3.0	117	4.6
120	3.0	3.6	141	5.5
150	3.8	4.5	177	7.0
200	5.1	6.0	237	9.4

### MC-EX3551 / MC-EX3051 / MC-EX353E / MC-EX303E

(1,024 x 768) (±10%)

a Screen size (diagonal)	4 : 3 screen			
	b Projection distance		c1 Screen height	c2 Screen height
type	min.	max.	cm	inch
60	1.5	1.7	69	2.7
80	2.0	2.4	93	3.7
100	2.5	3.0	116	4.6
120	3.0	3.6	140	5.5
150	3.8	4.5	176	7.0
200	5.1	6.0	236	9.3

### Suspended from the ceiling




\* The figure are not drawn to scale.


b : Projection distance (from the projector's front panel to screen, Tolerance ±10%) c1 : Screen height from lens center to top (when installed on a horizontal surface) c2 : Screen height from lens center to bottom (when installed on a horizontal surface)

## Dimensions

### [Top view]



### [Front view]



\*The figures above are not drawn to scale.

## Environment

### ► Compliance with EU Directive RoHS\*1

### ► Reduction of resin usage in production

Use of hot runners in molds for making upper housing in order to reduce mill ends.

### \*1

RoHS is the acronym of "Directive 2011/65/EU of the European Parliament and of the Council of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment".

## —Design and specifications are subject to change without notice.

• The projected images and comparison photos in this catalog are simulations. • LCD panels, polarizers and other optical components and cooling fans may need replacement after prolonged usage. For more details, please consult a sales representative. • Do not use in places where there is a lot of water, dampness, steam, dust, soot or tobacco smoke. This may result in fire or malfunction. • Optical components (lamp, LCD panel, polarizing plate, PBS [polarizer beam splitter]) have limited service lives. They must be repaired or replaced if they are used for a long period of time. • These projectors use a mercury lamp with high internal pressure. Because of its properties, this lamp may burst with a loud noise or burn out if struck or after it has been used for a period of time. The time until it bursts or burns out varies greatly according to differences between lamps and usage conditions. Turning the lamp's power on and off frequently shortens its service life.

# maxell

5030 Totsuka-cho, Totsuka-ku  
Yokohama, 244-0003, Japan  
<http://proj.maxell.co.jp/en/>

HITACHI 프로젝터를 개발, 생산, 판매하였던 HITACHI Maxell이 maxell로 바뀌면서 브랜드도 maxell로 변경되었습니다. 기존 제품 서비스도 변함없이 휴스텀에서 처리됩니다.

구입문의처

**Hustem**  
Color Communication Leader

주식회사 휴스텀  
maxell 프로젝트 한국 공식 수입원

서울시 강남구 대치동 943-27 신도빌딩 2층  
Tel: 02-6262-1000 (내) [www.hustem.com](http://www.hustem.com)  
고객상담실: 080-800-0115